

J.L.Fisher

Motion Picture &
Television Equipment

MODEL 11 CAMERA DOLLY

OUR MOST COMPACT HYDRAULIC LIFT DOLLY

The Model 11 is our smallest Dolly. Lightweight and compact, it is built with the same high quality standards found in all J.L. Fisher products. The Model 11 Dolly shares the same controls and characteristics of the Model 10 Dolly and has a complete line of its own accessories. It operates effortlessly on Square or Round Track, making the Model 11 and Model 10 an excellent two dolly combination.

200 LB (91kg) LIFT BEAM CAPACITY



The Model 11 Dolly is engineered and manufactured to meet the demanding production needs of the motion picture, television and video industries. Compact size, three-way steering and a solid lift beam give operators a wide variety of options. The reliable, quiet, smooth and safe Model 11 requires minimal maintenance.


STEERING MODES

REAR (CONVENTIONAL):
Front wheels are locked, rear wheels can rotate 360°.


CRAB: Front and rear wheels can rotate in unison 360°.

ROUND: Front and rear wheels rotate independently with mechanical compensation to allow variable radius turns, even down to 0 radius.


NARROW: Front and rear wheels can rotate 180° in any steering mode, providing a narrower wheel track for working in tight spaces.

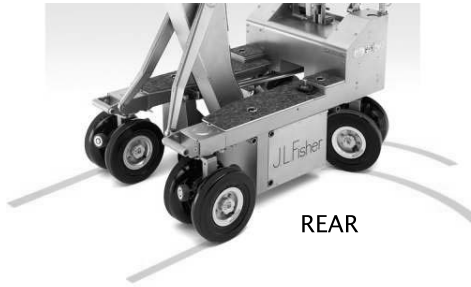

REAR

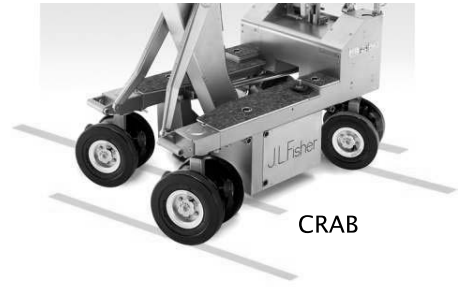

CRAB

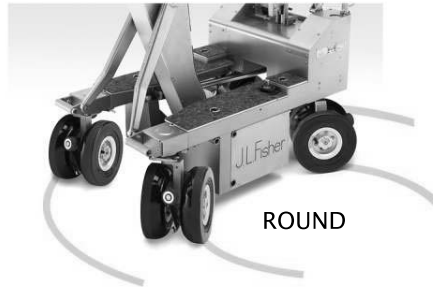

ROUND



NARROW

ACCEPTS 90 TO 240 VOLTS AC OR DC
TO CHARGE THE HYDRAULIC LIFT SYSTEM
IN AS LITTLE AS THREE MINUTES

REMOVABLE PUSH POSTS

UTILITY HOOKS

SINGLE LEVER
POSITIVE LOCKING
BRAKE SYSTEM

SELF-CONTAINED
TRACK GUIDE SYSTEM

BATTERY BOX


CABLE CLIPS ON BEAM

4 WAY
LEVEL HEAD

6 SEAT MOUNT LOCATIONS

SLIDING, CLOTH COVERED
CUSHIONED SEATS WITH
ADJUSTABLE HEIGHT

CARPETED
STANDING AREAS

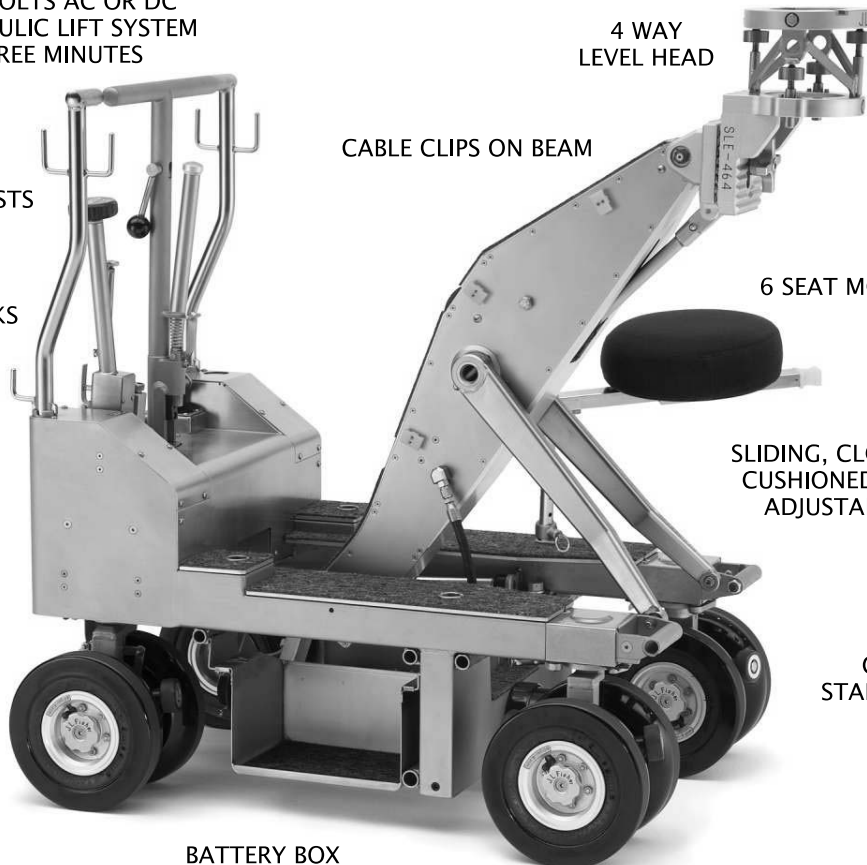

PUSH POSTS DOUBLE AS
REAR CARRY HANDLES




POSITIVE LOCKING BRAKES




BUILT-IN TRACK GUIDES
(Square Track Only)



MITCHELL MOUNT LEVELING HEAD WITH 4 WAY ADJUSTMENT AND 360° ADJUSTABLE DIAMOND PLATE



NEW CUE BOX WITH VARIABLE
LIFT RATE MEMORY STOPS AND
ADJUSTABLE DRAG KNOB

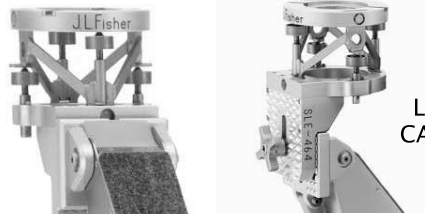

LEVELING HEAD
CAN BE REVERSED




SELF CENTERING HYDRAULIC
LIFT BEAM CONTROL KNOB
WITH SAFETY LOCK



OPTIONAL UP/DOWN LEVER
WITH SAFETY LOCK



HYDRAULIC HAND PUMP
FOR LOCATION WORK

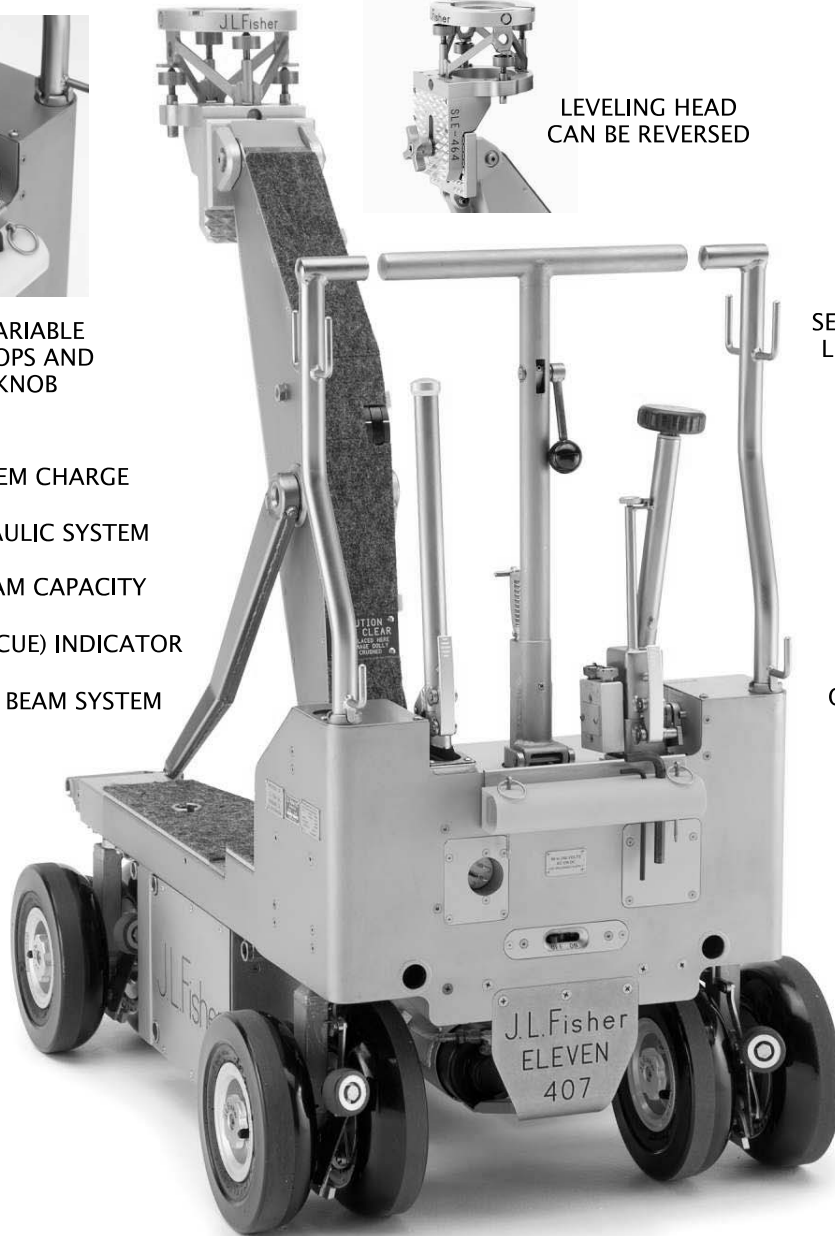

- SEVEN LIFTS PER SYSTEM CHARGE
- SELF-BLEEDING HYDRAULIC SYSTEM
- 200 lb (91 kg) LIFT BEAM CAPACITY
- LIFT BEAM POSITION (CUE) INDICATOR
- SELF-DAMPENING LIFT BEAM SYSTEM

PNEUMATIC TIRES


The Model 11 Dolly has a maximum load capacity of 900 lbs. (408 kg)



LIFT BEAM (CUE) INDICATOR



Power Requirements:
90 TO 240 VOLTS AC OR DC



UTILITY TRAY
(UTE)



FOLDING CONTROLS

STANDARD RENTAL PACKAGE

The Standard Rental Package includes these items:

1

SLE

4-way Level Head

1

HS

Hand Screw (for SLE)

1

ST

Small Seat

1

S

Large Seat

2

PP

Push Posts

2

LE

Low Side Boards

2

FE

Front Boards

2

HE

High Side Boards

2

CH

Carry Handles

1

PC

Power Cord

2

FPIN

Front Pins

1

BPR

Knee Bumper

2

AWR

Allen Wrenches

8

TSW

Pneumatic Tires

1

BRE

Battery Box



OPTIONAL ACCESSORIES

*Asterisk indicates items are included in the **FULL RENTAL PACKAGE**

Dolly Boards & Platforms

- SPE*

Standing Platform
- DEL*

Diving Board, Left
- DER*

Diving Board, Right
- SFB

Short Front Board
- SNFB

Short Narrow Front Board
- EFB*

Front Board Bridge
- FPE

Front Porch
- LFBE

Low Front Board




SPE*




DEL/DER*



SFB



SNFB

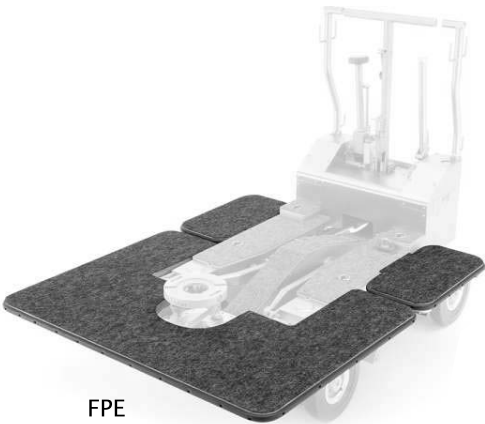

FPE



LFBE



EFB*

MORE OPTIONAL ACCESSORIES

*Asterisk indicates items are included in the **FULL RENTAL PACKAGE**

Risers

R3	Camera Riser, 3" (7.6cm)
R6*	Camera Riser, 6" (15.2cm)
R12*	Camera Riser, 12" (30.5cm)
R6BA	Camera Riser w/ 75mm Ball Adapter, 6" (15.2cm)
R6BB	Camera Riser w/ 100mm Ball Adapter, 6" (15.2cm)
R6BC	Camera Riser w/ 150mm Ball Adapter, 6" (15.2cm)
R12BA	Camera Riser w/ 75mm Ball Adapter, 12" (30.5cm)
R12BB	Camera Riser w/ 100mm Ball Adapter, 12" (30.5cm)
R12BC	Camera Riser w/ 150mm Ball Adapter, 12" (30.5cm)
RJ6	Heavy Duty Camera Riser, 6" (15.2cm)
RJ12	Heavy Duty Camera Riser, 12" (30.5cm)
RJ18	Heavy Duty Camera Riser, 18" (45.7cm)



Angle Plate

AP*	90-Degree Camera Angle Plate
-----	------------------------------



Offsets

U*	Camera Offset, 10" (25.4cm)
TH*	Camera Offset, 24" (61cm)
RO*	Rotating Offset
ROB	Rotating Offset w/ Ball Adapter, 150mm
ROL	Rotating Offset, Low
ROHL	Rotating Offset, High/Low
ROX	Rotating Offset, Long
ROP	Rotating Offset, Pivot



Adapters

75A	75mm Ball Adapter
100A	100mm Ball Adapter
150A	150mm Ball Adapter
UA	Universal Adapter
HBA	Half-Ball Adapter
MEA	Mitchell Euro Adapter
ESLE	Euro Boss Adapter



Low Level Head

LHE*	4-way Low Level Head
LHA	Low Head Adapter



Seat & Seat Accessories

RS	Rotating Seat
SOH*	Seat Offset High
SOS	Seat Offset Straight
SSOS	Seat Offset Short
SR6*	Seat Riser Adjustable



MORE OPTIONAL ACCESSORIES

Crossarms

- CRA1 Crossarm, 11.5" (29cm) to 19" (48cm) Reach
- CRA2 Crossarm, 15" (38cm) to 24" (61cm) Reach
- CRA3 Crossarm, 18" (46cm) to 29" (74cm) Reach
- CRA4 Crossarm, 23" (58cm) to 36" (91cm) Reach
- CRA6 Crossarm, 31" (79cm) to 53" (135cm) Reach



CRA4

* Note: All Crossarms require the use of the Center Mount (CM) and RJ12 Heavy Duty Riser on the Model 11 Dolly

Please refer to the Crossarm Brochure or our web site, www.jlfisher.com, for full specifications and options available

Jib Arms

- JIB20* Model 20 Jib Arm, 51.5" (131cm) Reach
- JIB21* Model 21 Jib Arm, 68.5" (174cm) Reach
- JIB22* Model 22 Jib Arm, 99.5" (253cm) Reach



JIB21

* Note: Model 20, 21 and 22 Jib Arms require the use of the Center Mount (CM) and RJ12 Heavy Duty Riser on the Model 11 Dolly

Please refer to the Jib Arm Brochure or our web site, www.jlfisher.com, for full specifications and options available

Fluid Heads

- WS2 Weaver/Steadman Fluid Head, 2 Axis
- WS3 Weaver/Steadman Fluid Head, 3 Axis
- V Vector 700 Fluid Head, 2 Axis



WS2


WS3

V

Other Accessories

- AC* Accessory Carts (pair)
- BAZ Bazooka (Pneumatic or Sectional)
- CHE Short Carry Handles
- CM Center Mount with RJ12 Riser
- CB Cue Board
- HH High Hat
- LA Lamp Adapter
- MRD Monitor Rack
- MLA Mitchell Lamp Adapter, Junior 1 1/8 in. (MLA)
- PB Push Bar
- SCO Scooter Board
- UDJ Dolly Jack (uses Push Post for handle)
- UTE Utility Tray


AC* (pair)



BAZ



CHE



CM



CB



HH



LA



MRD



MLA




PB



SCO



UDJ



UTE

Wheels & Ice Skates

- SHW Shaved Wheel
- SKE Ice Skates
- ETW Round Track Wheels
- SCWE Soft Compound Wheels
- SWE Soft Wheels
- SBWS Skateboard Wheels
- DSBC Dexter Skateboard Wheels



SHW



SKE



ETW



SCWE



SWE



SBWS / DSBC


Patents Pending

Track & Track Accessories

Straight Track sections fold to 5" wide for easy transport and storage


 Round Tube Track 1.5" (3.8cm) Diameter

Straight Track



	Length	Length (folded)	Weight
TR2	2' (.61m)	4.1' (1.3m)	11.8 lbs (5.4kg)
TR3	3' (.91m)	5.1' (1.6m)	15.0 lbs (6.8kg)
TR4	4' (1.2m)	6.1' (1.9m)	16.2 lbs (7.3kg)
TR6	6' (1.8m)	8.1' (2.5m)	23.8 lbs (10.8kg)
TR	8' (2.4m)	10.1' (3.0m)	30.2 lbs (13.7kg)
TR10	10' (3m)	12.1' (3.7m)	38.0 lbs (17.2kg)


All J.L. Fisher track is on 24.5" (62.23cm) center line between rails.

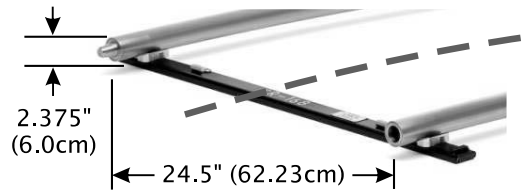

Square tube dolly track, not shown here, is available in similar sizes and diameters as the round tube track. Please call J.L. Fisher for sizes and availability.


Curved Track Diameters are Measured from Centerline Between Rails

Curved Track

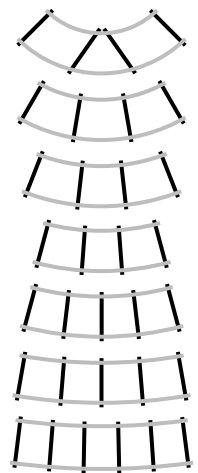

	Diameter Full Circle	Angle Section	Sections For Full Circle	Length* Section	Width* Section	Weight Section
CR10	10' (3m)	90°	4	8.7 ft (2.7m)	3.2 ft (.96m)	31.2 lbs (14.2kg)
CR15	15' (4.6m)	60°	6	8.5 ft (2.6m)	3.1 ft (.94m)	30.5 lbs (13.8kg)
CR	20' (6.1m)	45°	8	7.8 ft (2.4m)	3.0 ft (.91m)	29.0 lbs (13.2kg)
CR25	25' (7.6m)	30°	12	7.1 ft (2.2m)	2.8 ft (.85m)	27.8 lbs (12.6kg)
CR30	30' (9.1m)	30°	12	8.4 ft (2.6m)	2.9 ft (.88m)	33.8 lbs (15.3kg)
CR50	50' (15.2m)	20°	18	9.2 ft (2.8m)	2.8 ft (.85m)	34.5 lbs (15.6kg)
CR70	70' (21.3m)	15°	24	9.5 ft (2.9m)	2.8 ft (.85m)	38.8 lbs (17.6kg)

* Example



RMPR Track Ramp For Round Track
WED Track Wedges
TB Track Buckle

RMPR




WED



TB



Model 11 Dolly shown using Built-in Track Guides on Square Curved Track (CS2)

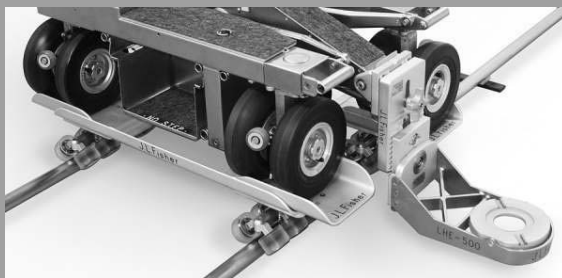

NEW SKATEBOARD WHEELS (SBWS) (Patents Pending) come with extensions to allow the Model 11 Dolly to be mounted sideways on the wheel frame. Shown here with the extensions in place, the LOW HEAD ADAPTER (LHA) and the LOW LEVEL HEAD (LHE) on Round Straight Track (TR10)




TRACK WHEELS (ETW) ON ROUND TRACK (TR)



BUILT-IN TRACK GUIDES ON SQUARE TRACK (STR)


Maximum Lift Beam Elevation	51.25 in. (130 cm)
Minimum Elevation (standard head).	13.875 in. (35 cm)
Minimum Elevation (low level head).	3 in. (8 cm)
Vertical Beam Travel	33.375 in. (85 cm)
Lift Beam Capacity	200 pounds (90.72 kg)
Lifts per System Charge.	7
Length	40 in. (102 cm)
Width (wheels in)	20.5 in. (52 cm)
Width (wheels out)	25.625 in. (65 cm)
Height (operating).	39.75 in. (101 cm)
Height (folded)	23.5 in. (60 cm)
Height (center mount, before riser)	36.75 in. (93 cm)
Minimum Turn Radius (round steering)	16.188 in. (41 cm)
Minimum Turn Radius (conventional steering).	33.5 in. (85 cm)
Maximum Dolly Load Capacity.	900 pounds (408.23 kg)
Battery Box (BRE) inside dimensions	10 in. (25.4 cm) W x 7 in. (17.8 cm) H x 6.75 in. (17.1 cm) D
Carrying Weight	316 pounds (143.33 kg)
Crated Size.	59 in. (150 cm) L x 31 in. (79 cm) W x 34 in. (86 cm) H
Crated Weight	775 pounds (351.5 kg) (standard package)

DIMENSIONS

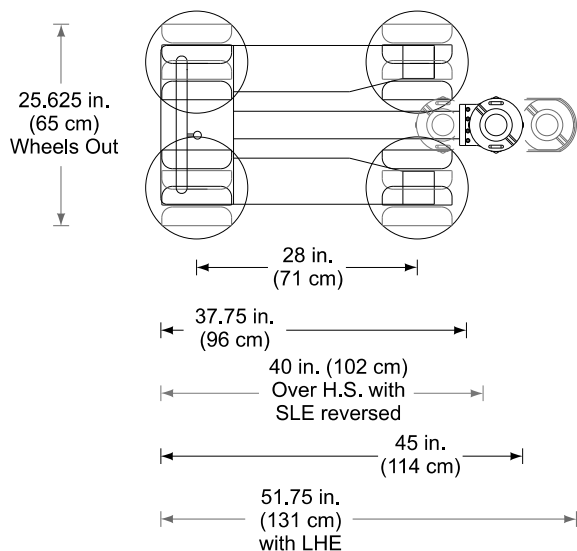

20.5 in.
(52 cm)
Wheels In

Note: Due to variables such as adjustments and choice of risers, wheels, etc., these dimensions are approximate.

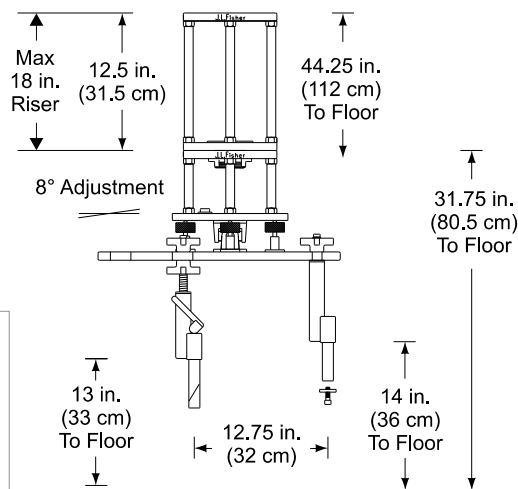


CENTER MOUNT (CM)

The Center Mount (CM), supports jib arms, lightweight camera booms and counterbalanced camera cranes. The Center Mount has thumbscrews for four-way leveling adjustment and a leveling indicator. Easily installed, the Center Mount has a standard Mitchell mount and comes with a heavy duty 12-inch Riser (RJ12).

The maximum gross load capacity of the Model 11 Dolly is 900 pounds (408 kg). Center Mount is not for supporting personnel or personnel carrying cranes.

MODEL 11 DOLLY

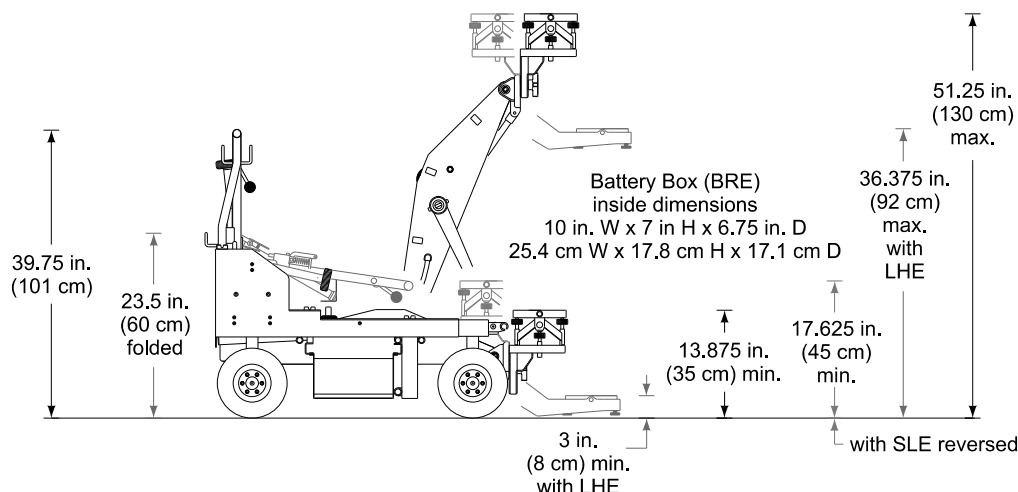

FOLDING CONTROLS

J.L. FISHER PRODUCTS ARE PROUDLY MADE IN BURBANK, CALIFORNIA U.S.A.

J.L. Fisher, Inc. Motion Picture & Television Equipment
 1000 W. Isabel Street, Burbank, CA 91506 U.S.A.
 Tel: (818) 846-8366 / Fax: (818) 846-8699
 Web: www.jlfisher.com e-mail: info@jlfisher.com

J.L. Fisher, GmbH Emil-Hoffmann-Str. 55-59 50996 Köln, Germany
 Tel: +49 2236 3922 0 Fax: +49 2236 3922 12
 Web: www.jlfisher.de e-mail: info@jlfisher.de